

ASHFORD FORMULA™

 EPD Certified



COMMERCE INDUSTRIES
INDUSTRY, CA, USA
by MARK BEAMISH WATERPROOFING
2020

*Think concrete's tough?
We make it tougher.*

BENEFITS

Ashford Formula is a chemically reactive liquid that penetrates concrete, solidifying the concrete surface components into a solid mass. It produces a permanently denser, harder, penetration and abrasion-resistant concrete surface. Ashford Formula is inorganic, non-toxic, VOC free, colorless and odorless.



Ashford Formula densifies concrete surfaces into a **solid mass** by penetrating the concrete and chemically filling the pores from within.

DENSIFIES



Ashford Formula chemically hardens the concrete surface, increasing the **abrasion resistance by 32%**.

ABRASION RESISTANCE



Ashford Formula **combines with calcium hydroxide**, becoming an integral part of the concrete, thus completely dustproofing the surface. This **reduces maintenance costs** and protects inventory and equipment from concrete dust.

DUSTPROOFS



Ashford Formula reacts immediately, chemically **stabilizing the finished concrete surface**. It also **accelerates and enhances hydration of the portland cement**, helping the concrete reach its design properties.

CURES



Over time, Ashford Formula treated floors will develop a permanent and attractive sheen. Rather than eroding with traffic, the floor surface actually begins to self polish.

Note: Open or porous surfaces, or floors with poor surface integrity may not achieve these results.

PERMANENT SHEEN



Application of the Ashford Formula is a one-time, permanent application. This **eliminates** the need for **expensive re-application materials, labor costs** and **facility downtime**. Routine surface cleaning is all that is required for long-term maintenance.

ELIMINATES HIGH MAINTENANCE COSTS

DENSIFY FOR STRONGER, TOUGHER CONCRETE FLOORS


For years, concrete floors were protected with films and coatings - merely temporary solutions which wear away and require re-application. Ashford Formula takes a different approach by penetrating the concrete surface, growing crystals in the concrete itself. This reaction fills the natural pores and voids in the concrete, densifying the surface internally.



NON-DENSIFIED CONCRETE

A simple scratch test with a metal object demonstrates the softness of non-densified concrete.

This non-densified concrete sample reveals the porous structure of concrete, which leads to wear and deterioration.

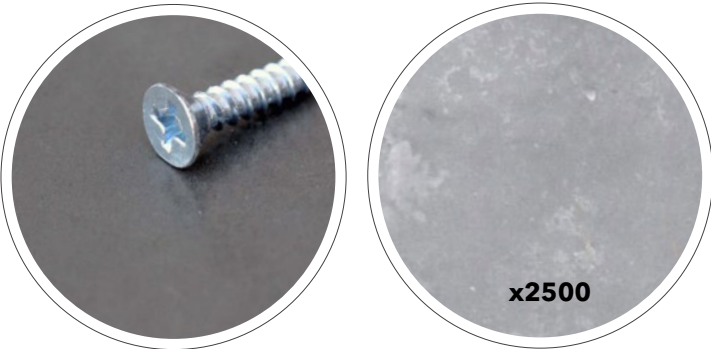

ASHFORD FORMULA DENSIFIED CONCRETE

Scratching a concrete surface densified with Ashford Formula reveals no erosion or dusting. Ashford Formula has strengthened the concrete surface from within.

Ashford Formula densifies by penetrating the concrete surface and filling the natural pores and voids with crystalline growth.



PROLOGIS PARK
SAITAMA, JAPAN
by COSMO TRADE
2015

THE RIGHT DECISION NOW, AND FOR THE FUTURE

There are so many choices and so many reasons, but the decision is simple. An Ashford Formula treated floor simply out-performs the competition in results and long-term cost savings, with an economical one-time investment. Properly densifying your floor means doing the job right the first time for results that last a lifetime.

SUBSTANTIAL COST SAVINGS

- ▶ Proven long-term performance at minimal cost
- ▶ Single, permanent application - no need for expensive re-application materials, labor or costly facility downtime
- ▶ Quick application - saves valuable construction time and cost
- ▶ Eliminates high maintenance costs - only routine cleaning is required for optimum results

REDUCED ENVIRONMENTAL IMPACT

- ▶ Use of existing concrete floors as the finished surface
- ▶ Permanent life cycle - no need for replacement like floor coverings
- ▶ Produces no fumes, vapors, off-gassing; VOC free - improves indoor air quality
- ▶ Contributes to LEED points for sustainable building
- ▶ Packaged in re-conditioned blue drums

CERTIFICATIONS & RECOGNITIONS

- ▶ TÜV SÜD TM 14 Tested and Certified
- ▶ Zero (0) VOCs
- ▶ CE Declaration of Conformity
- ▶ REACH Certified
- ▶ NFSI Certified "High-Traction"
- ▶ Approved for use in food handling facilities



Click to View



“ I AM CONVINCED THAT THE ASHFORD FORMULA IS THE ONLY WAY TO GO, AND I DON'T HESITATE TO GIVE THE FORMULA AN UNQUALIFIED RECOMMENDATION. ”

J. Keith McCoy, Chief of Maintenance, Pennzoil Company



PENNZOIL EXECUTIVE HANGAR
HOUSTON, TX, USA
1980



1



2



3



4

REAL PROJECT HIGHLIGHTS ▼

- 1 **LEGO**
by eMZet SRO - CZECH REPUBLIC
- 2 **Las Vegas Convention Center - West Hall**
by Midwest Pro Painting - USA
- 3 **Otis Offices**
by ERA Ltd. - TURKEY
- 4 **Parking Garage**
by Ashford Formula de Mexico - MEXICO
- 5 **Costco**
by Gia Phu Dinh Construction - VIETNAM
- 6 **Uline Warehouse**
by Sanders & Wohrman - USA
- 7 **China Tobacco Distribution Center**
by Wuxi Hua Can Chemical - CHINA
- 8 **Melbourne Market Relocation**
by Green Concrete Products - AUSTRALIA

INDUSTRIES SERVED ▼

- > Correctional Facilities
- > Exhibit Halls
- > Parking Decks / Garages
- > Warehouses
- > Data Centers
- > Manufacturing Plants
- > Retail Stores
- > Distribution Centers
- > Outdoor Concrete
- > Stadiums / Sports Arenas

Note: This is not a comprehensive list. Ashford Formula and Curecrete's line of supporting products can be used on most any concrete floor serving a multitude of industries and functions.



5



6



7



8

REAL PROJECTS



ONLINE
PHOTOBOOK
More amazing project
photos at your fingertips!

A SOLID FOUNDATION, FROM THE GROUND UP

Your business productivity requires a solid, **DENSIFIED** concrete floor.

Your concrete floor is more than a building foundation. It is also the foundation of your business productivity. For lifelong floor performance, long-term cost effectiveness and sustainability, worldwide corporations like Caterpillar, CocaCola, DHL, Procter & Gamble, IKEA and Whirlpool have chosen Ashford Formula as their concrete densifier of choice.

With its one-time application, the Ashford Formula never requires re-treatment. It provides exceptional performance for the entire life of your floor. Never halt your business productivity or pay for costly repeated applications down the road. It's why notable worldwide corporations have chosen the performance of the Ashford Formula.

With the longest proven track record of performance in the industry, over 75 years, Ashford Formula is the trusted product for permanent, superior concrete floor results.



FERRO TORRE SA
GUAYAQUIL, ECUADOR
by SEPISA CORP
2017

DESCRIPTION

Clear, odorless, non-toxic, non-combustible, non-flammable. Contains no VOCs.

USES

Concrete, heavyweight concrete block, exposed aggregate and other sand/aggregate portland cement combinations.

New or old concrete, rough or smooth surfaces.

FUNCTIONS

Densifies, dustproofs, hardens and cures. Protects against dusting, pitting, spalling, efflorescence and surface crazing. Inhibits freeze/thaw deterioration.

PACKAGING

- 55 - gallon drums / 208 liters
- 5 - gallon pails / 19 liters

STORAGE LIFE

Indefinite. Agitate before use.

COVERAGE

Approximately 200 ft²/gal (5 m²/L).

Coverage may depend on the temperature and porosity of the concrete.

TEMPERATURE LIMITS

Apply in temperatures up to 115°F (46°C) or as low as 35°F (1.7°C) and protect from freezing for a period of six (6) days.

SURFACE PREPARATION

- Freshly Finished Concrete (NEW): No preparation required.
- Existing Concrete (OLD): Sweep, scrub or strip concrete to remove any surface contaminants or film.

APPLICATION

Only one permanent application is required. Apply with high-volume, low-pressure sprayer until flood coat is achieved. Work material into the surface with fine-bristled brooms, or with an auto scrubber. Keep the entire surface wet with Ashford Formula for 30 minutes. Then when the Ashford Formula becomes slippery, flush completely with water and squeegee dry or vacuum excess with an automatic scrubber.

**See Spec Data Sheet or Application Specifications for specific details.*

DRYING TIME

One (1) to three (3) hours. The surface may be used as soon as the application is complete and the surface is dry to the touch. Newly placed concrete requires the normal hardening period.

SURFACE APPEARANCE

On smooth troweled concrete, a sheen develops within 6-12 months. All other surfaces retain their natural appearance. The sheen can be accelerated by burnishing the floor. A spiff coat can also be used to enhance the initial sheen.

EQUIPMENT CLEAN-UP

Use soap and water before the Ashford Formula dries.

PAINTING

Allow at least seven (7) drying days before applying paint on existing concrete.

Allow twenty-eight (28) days for proper curing before painting new concrete.

NOTES

Apply to colored concrete only after the slab is fully cured, unless installed by a factory certified applicator.

Do not allow to dry on finished surfaces (glass, aluminum, stainless steel, walls, etc.) as permanent etching may occur. Any spills on these surfaces should be removed while the Ashford Formula is still in liquid form.

The Ashford Formula may not prevent deterioration of floor slabs on which salts from ice melt are allowed to accumulate, especially when the floor is exposed to frequent wet/dry cycles. Regular and frequent cleaning of all slabs exposed to road salts is critical to preventing salt-related damage.

Although the Ashford Formula provides a dense concrete surface, it cannot in all cases prevent the migration of moisture vapor from beneath a floor slab. In conditions of high vapor drive, salts and other inorganics may still be deposited on concrete floor surfaces treated with the Ashford Formula, especially when no vapor barrier has been installed beneath the slab.

*Ashford Formula is a highly effective compound which delivers superior results. Application should be performed by qualified contractors with a clear understanding of its application and uses. *See Spec Data Sheet or Application Specifications for specific details.*


While the hardening and the dustproofing benefits accrue within hours or days, the densification of the floor surface takes longer. It is the result of ongoing and inorganic crystalline growth.



INCREASED ABRASION RESISTANCE

ASTM C 779 - Depth of Wear


Abrasion Resistance to Revolving Disks:
An **improvement of 32.5%** over untreated samples after 30 minutes.

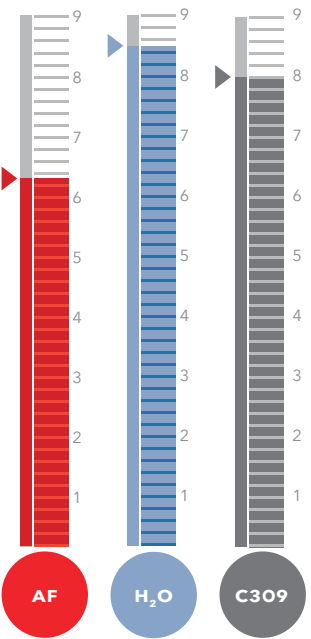

ENHANCED CURING

ASTM C 856 - Petrographic Examination (Density of the Paste)

The number of unhydrated cement grains remaining on the surface - depth of 150 - 250 µm. **Fewer unhydrated cement grains mean better curing.**

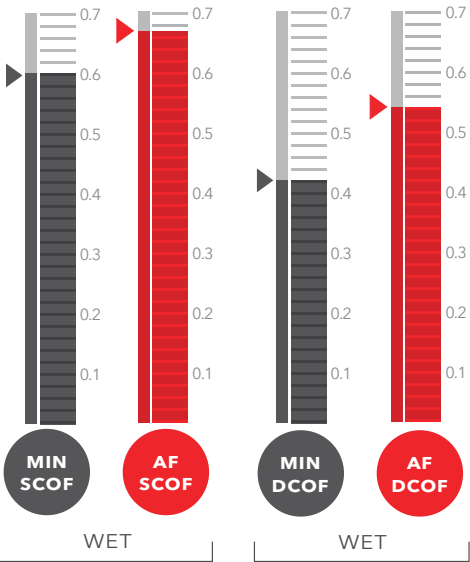

HIGHER FRICTION

ANSI / NFSI B101.1-2009 & ANSI / NFSI B101.3-2012

Static Coefficient of Friction (SCOF) and Dynamic Coefficient of Friction (DCOF) minimum standards vs. Ashford Formula:
SCOF - 0.60 vs. 0.67 // DCOF - 0.42 vs. 0.54



GREATER IMPACT RESISTANCE

ASTM C 805 - Rebound Number

Impact Resistance by Schmidt Hammer:
An **increase of 13.3%** over untreated samples.

BONDING

ASTM D 3359 - Surface Adhesion

Adhesion of Coatings:
For epoxy, a **22% increase in adhesion** over untreated samples. No change in adhesion for polyurethane.

PERMEABILITY

Seepage Rate

Using a 7 in. (177.8 mm) head of water on a 4.91 in² (124.71 mm²) area treated with Ashford Formula only allowed a rate of 0.00073 oz (0.022 cc) / hour. After several days the sample became damp, but **no observable local seepage.**

WEATHERING

ASTM G 23 - Light Exposure Degradation

Exposure to ultraviolet light and water:
No evidence of adverse effects on the samples treated with Ashford Formula.

VOC EMISSION TEST COMPLIANCE

California Dept of Public Health
CDPH / EHLB / Standard Method
Version 1.2, 2017

Indoor air quality compliant.
Certificate and test results available upon request.

ELECTRICAL RESISTANCE OF DISSIPATIVE RESILIENT FLOORING

ASTM F150 - Standard Test Method for Electrical Resistance of Conductive & Static Dissipative Resilient Flooring

Does not contribute to increased static.
Certificate and test results available upon request.

QUICK LINKS

APPLICATION
SPECS



HPD



MANU
SPEC



SAFETY
DATA
SHEET
(SDS)



TECH
SPEC
DATA



MAINTENANCE

PROPER MAINTENANCE
OPTIMAL PERFORMANCE
...for a lifetime.

MAINTENANCE PROGRAM

An effective maintenance program that includes routine scrubbing with stiff bristle brushes, ample down pressure, and proper amounts of water and cleaner will enhance the floor's performance significantly. Implementation of the following maintenance program will allow the Ashford Formula to continue to react with the concrete, lifting contaminants away from the concrete and allowing the marble-like sheen to develop.

Scrub Floor OFTEN: Minimum routine cleaning 2 - 3 times per week with *CreteClean Plus with Scar Guard* provides superior results.

Clean Spills QUICKLY: After densification is complete, concrete will resist contamination and moisture penetration of most liquids. Corrosive or aggressively staining contaminants should be removed quickly to avoid possible staining.

RECOMMENDED SUPPLIES

- > **Automatic Scrubber**
Capable of 90 - 120 lbs. of downward pressure.

> **Medium-Aggressive Nylon Brushes**
Accelerates the sheen and creates a more uniform appearance.

> **Cleaner*: *CreteClean Plus with Scar Guard*™**
Performance enhancing cleaner specifically designed to clean densified and densified-polished concrete floors. Regular use helps decrease the visibility of minor scratches and blemishes and helps maintain the concrete sheen.
- > **Large Volumes of Water**
Water used while cleaning the concrete surface will actually accelerate the reaction between Ashford Formula and the concrete.

> **Chemical Strippers: *CreteStrip*™, *CreteStrip FS*™**
Use as directed and necessary.

> **Polypropylene or Stiff-Poly Brushes**
Regular maintenance after sheen develops.
- *If other cleaners are used they should be non-acidic and void of hydroxides and sulfates.*

RECOMMENDED PRODUCTS

CLEANER:



- 1 gal. (3.79 L) jugs
 - 5 gal. (19 L) pails
 - 55 gal. (208 L) drums
- 12 oz bottle with easy dosing meter for mop and bucket cleaning, and small and large auto scrubbers!

CHEMICAL STRIPPERS:



- 5 gal. (19 L) pails
 - 55 gal. (208 L) drums
- 1 gal. (3.79 L) jugs
 - 5 gal. (19 L) pails

SALT PROTECTION:



- 5 gal. (19 L) pails
- 55 gal. (208 L) drums



The use of truck soap had caused this floor to have a dull appearance. After a proper maintenance program was implemented, the natural sheen from the Ashford Formula was once again visible.

NORTH POINT TOYOTA
LITTLE ROCK, AR, USA
by ROBERTS-MCNUTT, INC.
2007



AIRCRAFT HANGAR
BRUNEI
by BUE BRUNEI
2014

The TRUTH is...
How you treat your floor now, determines
how your floor will treat you down the road.

LIFELONG, OPTIMAL PERFORMANCE

Cleaning your Ashford Formula floor is convenient, economical and will result in a floor that has a marble-like sheen that improves with age. With Ashford Formula, there is no surface film or coating present to peel, blister or require expensive replacement and repeated applications. The floor's performance, as well as the satin sheen that develops over time, are enhanced by proper cleaning and maintenance. Following a proper maintenance program as outlined here will ensure optimal floor performance for a lifetime.

EXPECTATIONS FROM A PROPERLY MAINTAINED FLOOR

IMMEDIATELY AFTER TREATMENT

- ▶ The hardening and dustproofing will take effect within the normal curing period on new concrete and within 24-48 hours on existing concrete. **The floor will have a normal concrete appearance or a slight sheen (broom-finished or rough-textured concrete will retain its natural concrete appearance).**
- ▶ The hardening and dustproofing properties of the Ashford Formula will accrue immediately. However, care should be taken not to gouge the floor with nails, etc. after the initial placement.
- ▶ To accelerate the sheen, the floor can be burnished with a high speed propane burnisher and a black stripping pad at 1800 to 3000 RPMs, or cleaned daily using an auto-scrubber equipped with medium-aggressive nylon brushes. A spiff coat can also be done to enhance the initial sheen.

3-6 MONTHS AFTER TREATMENT

- ▶ If the standard maintenance program is followed, smooth-troweled floor surfaces will develop a sheen. **Note: A sheen will not develop on floors with an open, porous finish, or on floors with a broom finish.**
- ▶ On steel-troweled floors, water typically begins to bead on the surface.

12 MONTHS AFTER TREATMENT

- ▶ A hard shell-finished surface will develop.
- ▶ Compact, steel-troweled surfaces will be more resistant to oil penetration and moisture contamination.

ONE COMPLETE SYSTEM

ONE COMPLETE SYSTEM FOR ALL YOUR DENSIFIED AND DENSIFIED-POLISHED CONCRETE FLOORING NEEDS



Product availability may vary by market. Contact your local representative.

ONE EXPERT SOURCE



QUALITY

A quality floor, paired with quality products, equals superior flooring results. Let our products take your floor to the next level.

PERFORMANCE

From start to “finish,” our One Complete System of concrete floor products outperforms the competition and will enhance your concrete floors’ performance durability, longevity and appearance.

VALUE

Your floors, done right, and done once, will save you time and money in the long term. Products that don’t perform, and which require repeat applications, hamper your business’ productivity and bottom line.

75+ YEARS OF LIVING PROOF THAT ABSOLUTELY CAN’T BE DISPUTED

Whether old or new concrete, our products will enhance your floor’s performance, ensuring its durability and longevity for a lifetime.

THE DIFFERENCE

“GREEN” BY DESIGN FROM THE VERY BEGINNING

The Ashford Formula and the concept of concrete densification was “green” well before going “green” ever became a movement. The permanent effects of this unique combination will save significant time, money and energy in the long term.

The Ashford Formula’s green qualities make it an exceptional choice for today’s sustainable and green building initiatives. It has been widely specified for use on projects that have garnered LEED Certified, LEED Silver, LEED Gold and LEED Platinum status.




LEED PLATINUM

The John and Frances Angelos Law Center

University of Baltimore

by Cuiello Concrete

2012

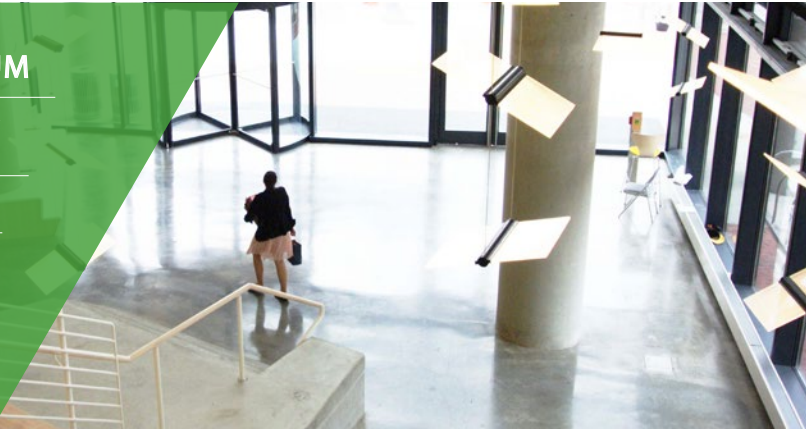

SUSTAINABILITY BENEFITS

- 1 Energy Cost Savings
- 2 Reduce Life Cycle Impacts
- 3 No Off-Gassing
- 4 Improved Thermal Comfort
- 5 Increased Daylighting; Light Reflection



1989



2009



As if 75+ years isn’t proof enough of the Ashford Formula’s enduring performance, Curecrete Distribution, Inc. offers a standard **20-Year Product Performance Warranty** on Ashford Formula floors, as well as a **Lifetime* Product Performance Warranty** - the longest warranty offered in the industry - when maintained with *CreteClean Plus with Scar Guard™*.

*Qualifying conditions apply.

CURECRETE - SETTING THE STANDARD, RAISING THE BAR



Curecrete Distribution, Inc. has been providing leadership in the concrete densification industry for more than 75 years. Curecrete continues to lead with an unwavering commitment to superior products, best practices and industry expertise.

CONTACT ▶ 1203 Spring Creek Place
Springville, UT 84663, USA
(801) 489-5663
(800) 998-5664

www.ashfordformula.com
www.curecrete.com

TECHNICAL INFO ▶ (801) 489-5663
(800) 998-5664


techsupport@ashfordformula.com

CUSTOMER SERVICE ▶ (801) 489-5663
(800) 998-5664

customercare@curecrete.com

REPRESENTATIVES & INTERNATIONAL DISTRIBUTORS ▶ *Ashford Formula is sold through a network of manufacturer representatives and international distributors. To contact your representative or distributor, please visit:*

www.ashfordformula.com/reps

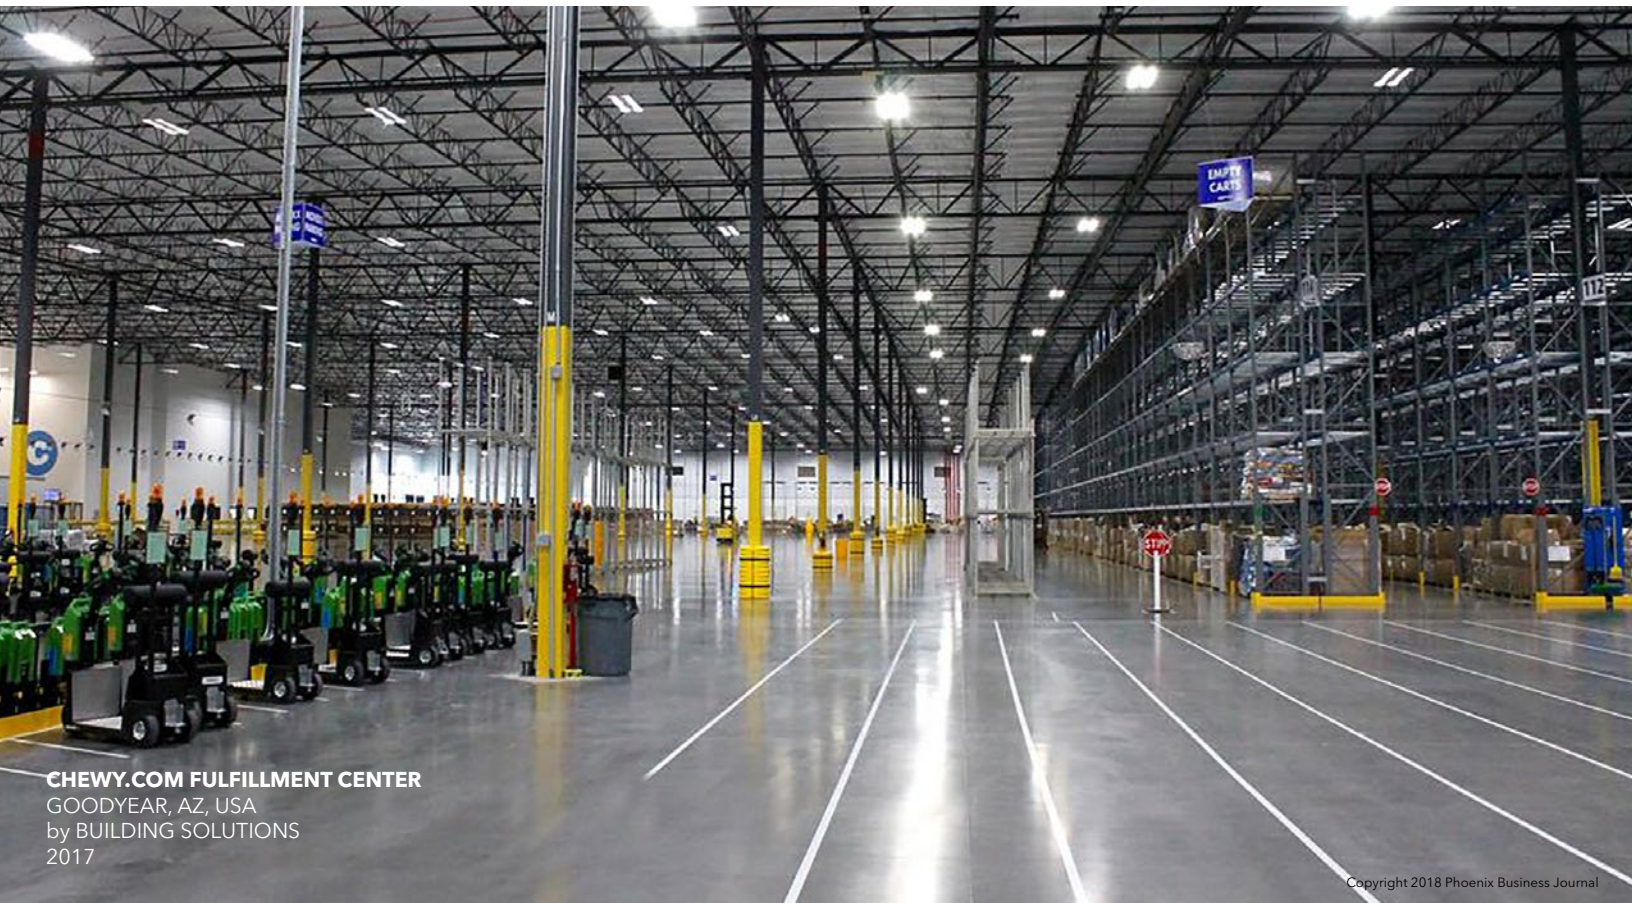

CHEWY.COM FULFILLMENT CENTER
GOODYEAR, AZ, USA
by BUILDING SOLUTIONS
2017

Copyright 2018 Phoenix Business Journal

A SOLID FOUNDATION, FROM THE GROUND
Because your business productivity requires a solid, DENSIFIED concrete floor.